

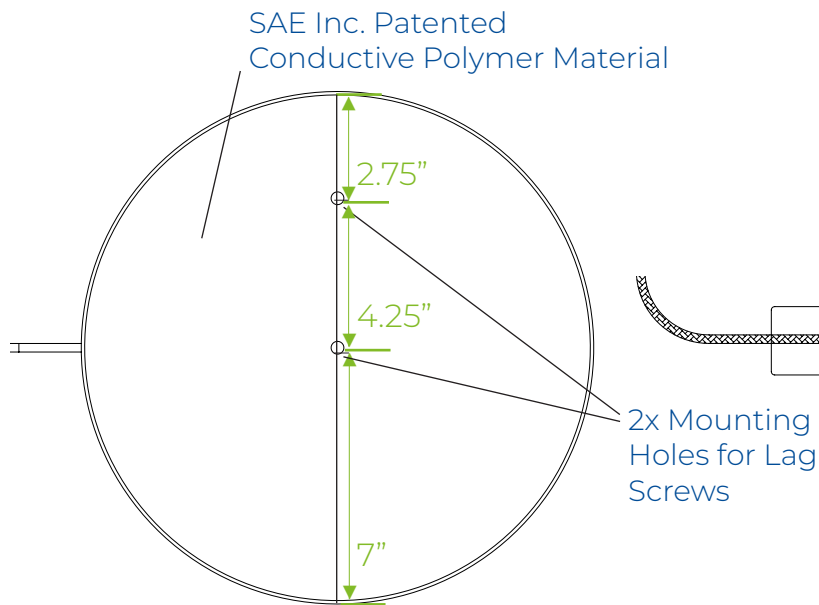


ConduDisc Pro Product Specifications

Top View

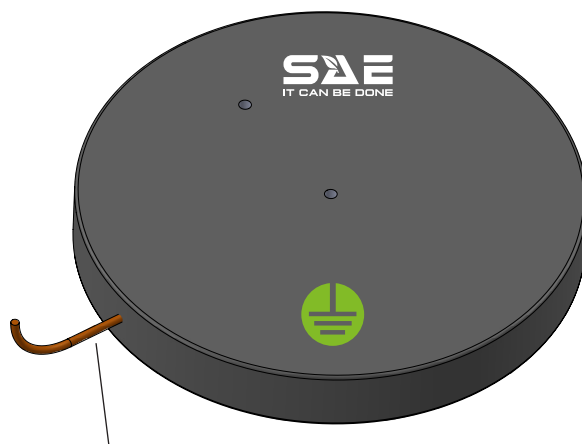


Side View

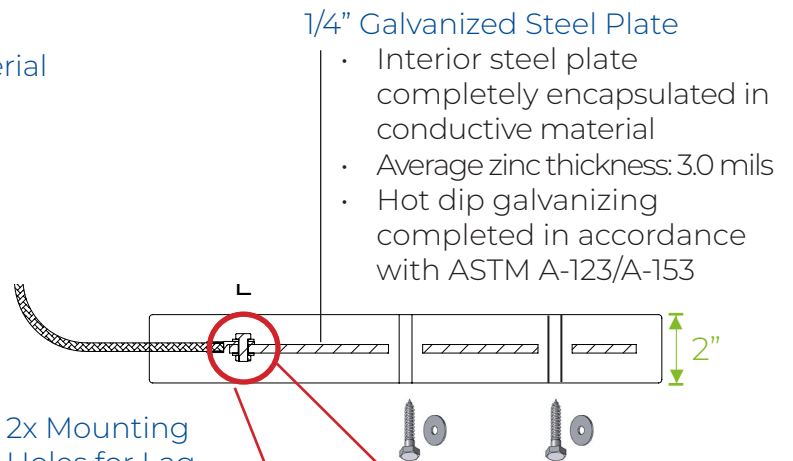

Copper or Copperweld® Conductor

Choice of #6 - 4/0 wire available upon ordering

Installation is reversible - can be mounted from either side

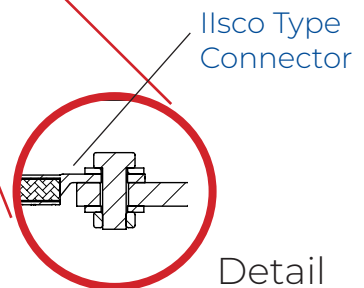



Assembled and installed to plate before molding process

Not to Scale

Published Date: November 2021

ConduDisc Flex Product Specifications | 1 SLOT

Top View

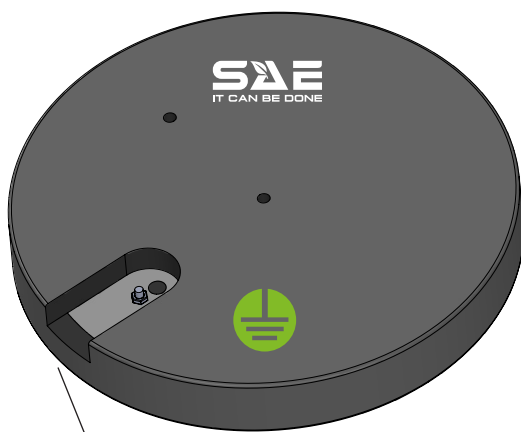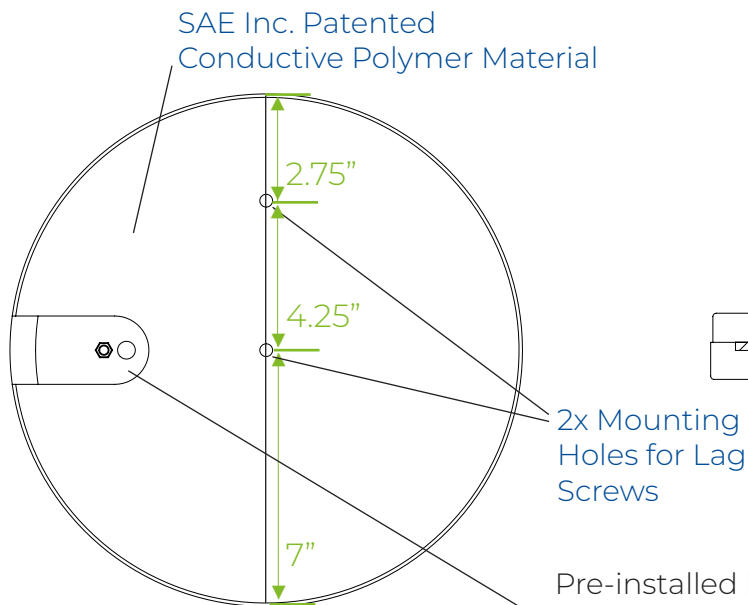


Connect #6 - 4/0 wire of choice




User installed wire
and fitting (typical).
Sold separately

Side View

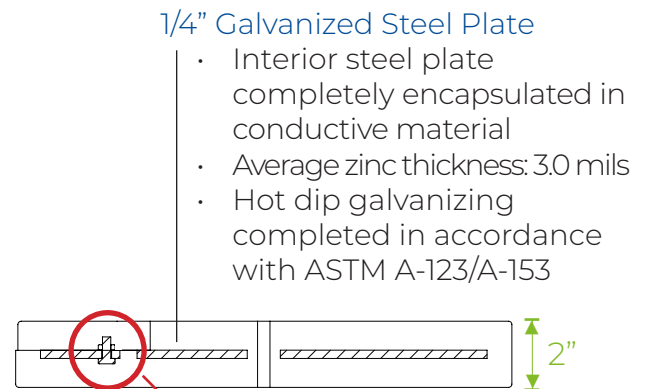

Pre-installed bolt
and nut (1 only)
in options of 1/4",
1/2", 6mm or 12mm



Detail

Installation to be
this face against
the pole bottom




Each ConduDisc Flex is packaged
with a user applied proprietary
ConduDisc Flex Sealant Kit to fill
all slots.

Not to Scale

Published Date: January 2022

ConduDisc Flex Product Specifications | 3 SLOT

Top View

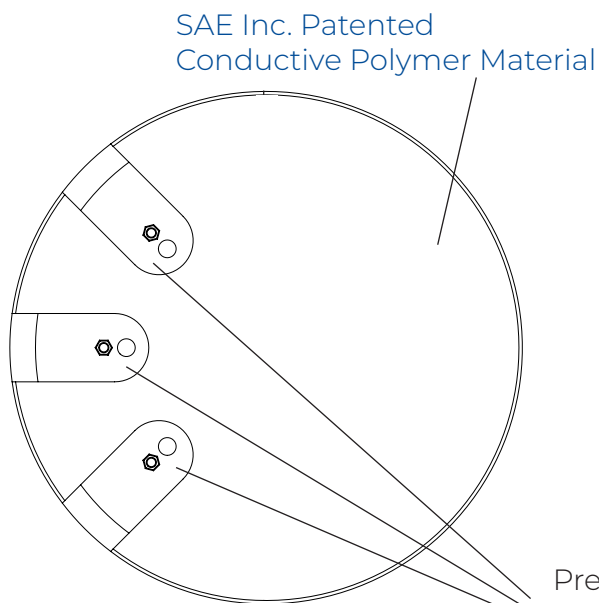

Connect #6 - 4/0
wire of choice





User installed wire
and fitting (typical).
Sold separately

Side View

1/4" Galvanized Steel Plate

- Interior steel plate completely encapsulated in conductive material
- Average zinc thickness: 3.0 mils
- Hot dip galvanizing completed in accordance with ASTM A-123/A-153



Detail

Pre-installed bolt
and nut (1 per slot
only) in options of
1/4", 1/2", 6mm or
12mm




Each ConduDisc Flex is packaged
with a user applied proprietary
ConduDisc Flex Sealant Kit to fill
all slots.

Not to Scale

Published Date: January 2022

ConduDisc Flex Product Specifications | 4 SLOT

Top View

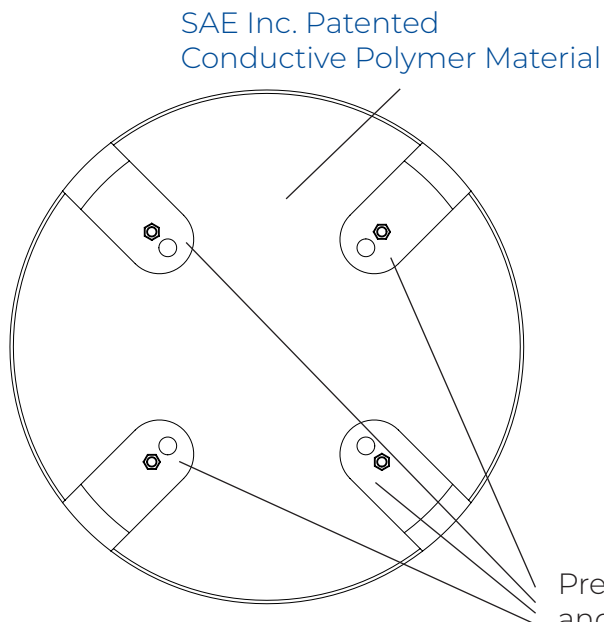

Connect #6 - 4/0
wire of choice





User installed wire
and fitting (typical).
Sold separately

Side View

1/4" Galvanized Steel Plate

- Interior steel plate completely encapsulated in conductive material
- Average zinc thickness: 3.0 mils
- Hot dip galvanizing completed in accordance with ASTM A-123/A-153



Detail



Each ConduDisc Flex is packaged with a user applied proprietary ConduDisc Flex Sealant Kit to fill all slots.

Not to Scale

Published Date: January 2022

saeinc.com

1 877 234 2502 | 705 733 3307
info@saeinc.com