



ConduDisc Pro Product Specifications


Top View

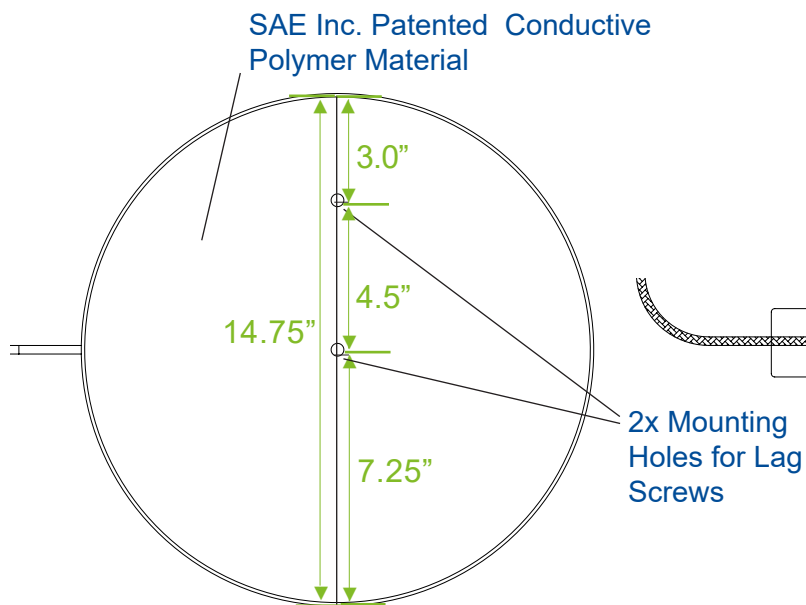

Side View

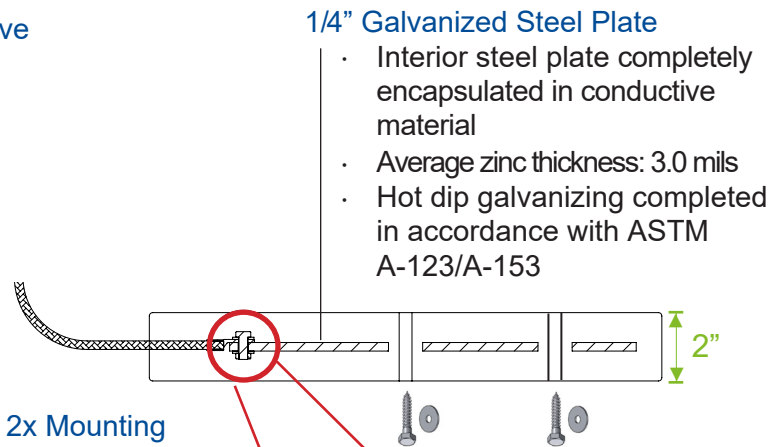


Ilco Type Connector



Detail

Installation is reversible - can be mounted from either side

Assembled and installed to plate before molding process

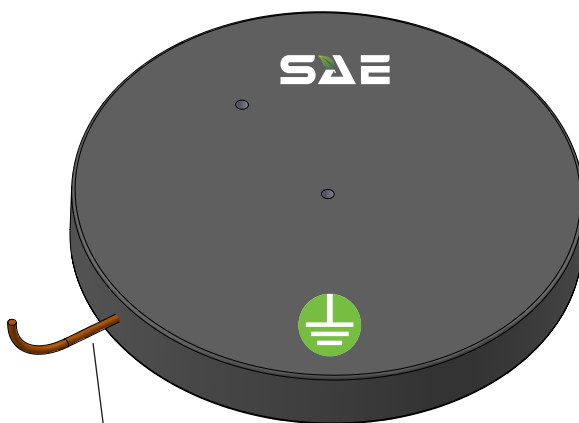


Copper or Copperweld® Conductor
Choice of #6 - 4/0 wire available upon ordering

Not to Scale



Published Date: November 2025

ConduDisc Flex Product Specifications | 1 SLOT

Top View

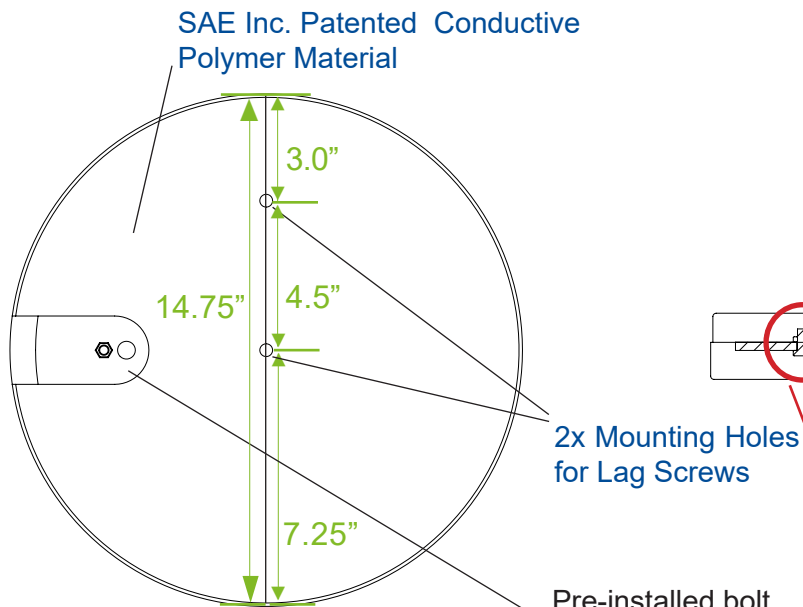

Side View

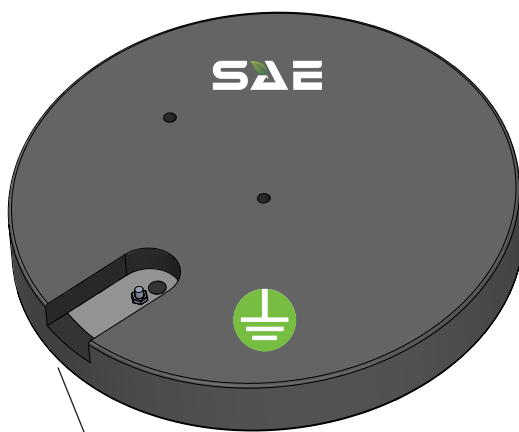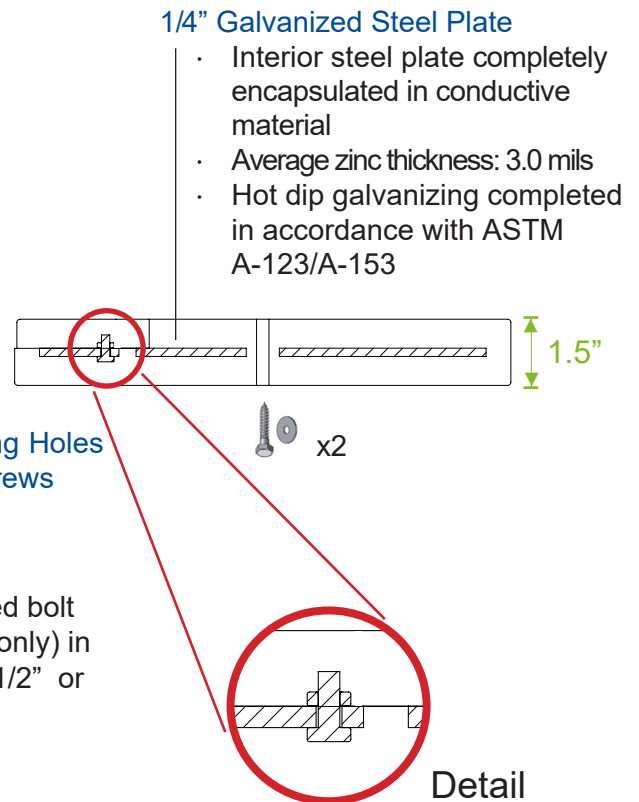

Connect #6 - 4/0 wire of choice




User installed wire and fitting (typical). Sold separately

Not to Scale

Published Date: November 2025

ConduDisc Flex Product Specifications | 3 SLOT

Top View

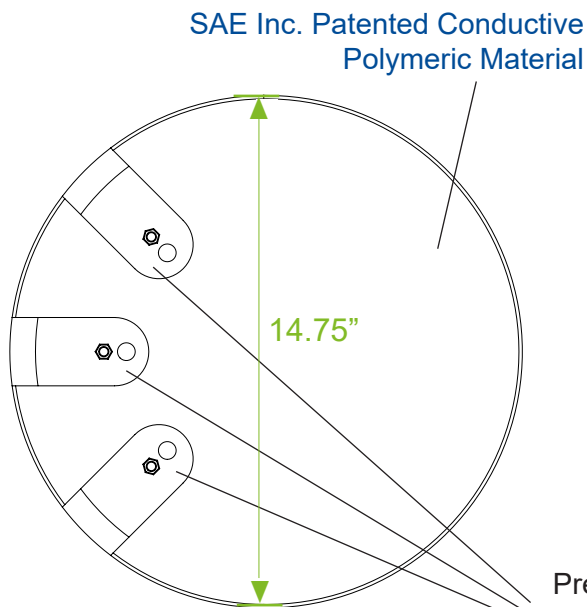

Pre-installed bolt and nut (1 per slot only) in options of 1/2" or 10 mm

Connect #6 - 4/0 wire of choice





User installed wire and fitting (typical). Sold separately

Side View

1/4" Galvanized Steel Plate

- Interior steel plate completely encapsulated in conductive material
- Average zinc thickness: 3.0 mils
- Hot dip galvanizing completed in accordance with ASTM A-123/A-153




Detail

Not to Scale

Published Date: November 2025

ConduDisc Flex Product Specifications | 4 SLOT

Top View

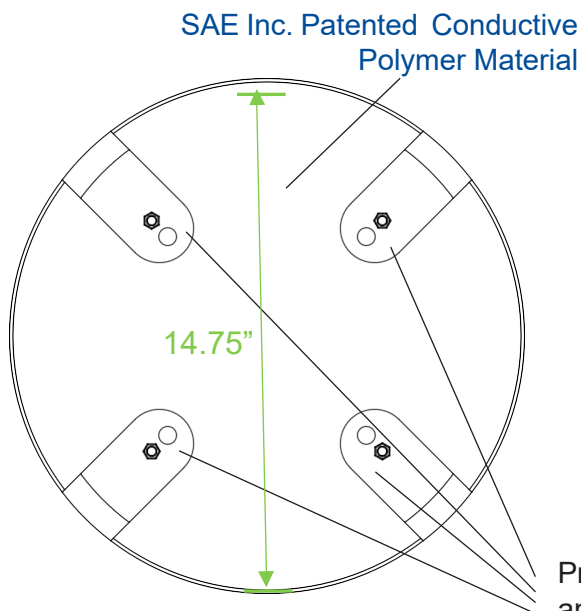

Connect #6 - 4/0
wire of choice





User installed wire
and fitting (typical).
Sold separately

Side View

1/4" Galvanized Steel Plate

- Interior steel plate completely encapsulated in conductive material
- Average zinc thickness: 3.0 mils
- Hot dip galvanizing completed in accordance with ASTM A-123/A-153



Detail


Pre-installed bolt
and nut (1 per slot
only) in options of
1/2" or 10 mm

Not to Scale


Published Date: November 2025

ConduDisc Elite Product Specifications


Top View

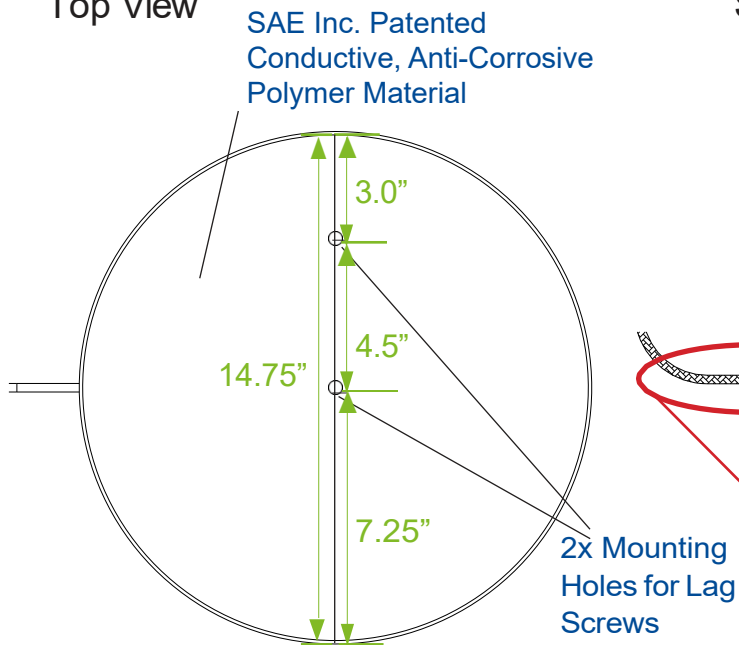

Side View

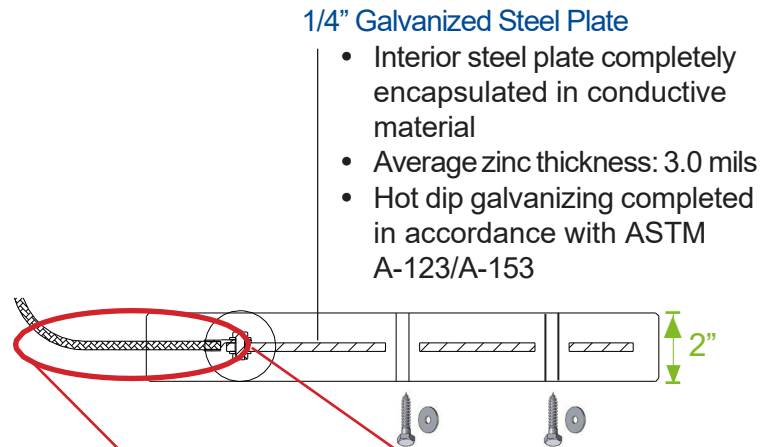

Detail



ConduWire Conductor

ConduWire is a conductive, flexible, easy to strip jacket that prevents copper corrosion while maintaining the fundamental electrical conductivity to ground.

Choice of #6 AWG - 4/0 wire available upon ordering.



Installation is reversible - can be mounted from either side.

Not to Scale

Published Date: November 2025